Alle Rechte vorbehalten/ *All rights reserved*

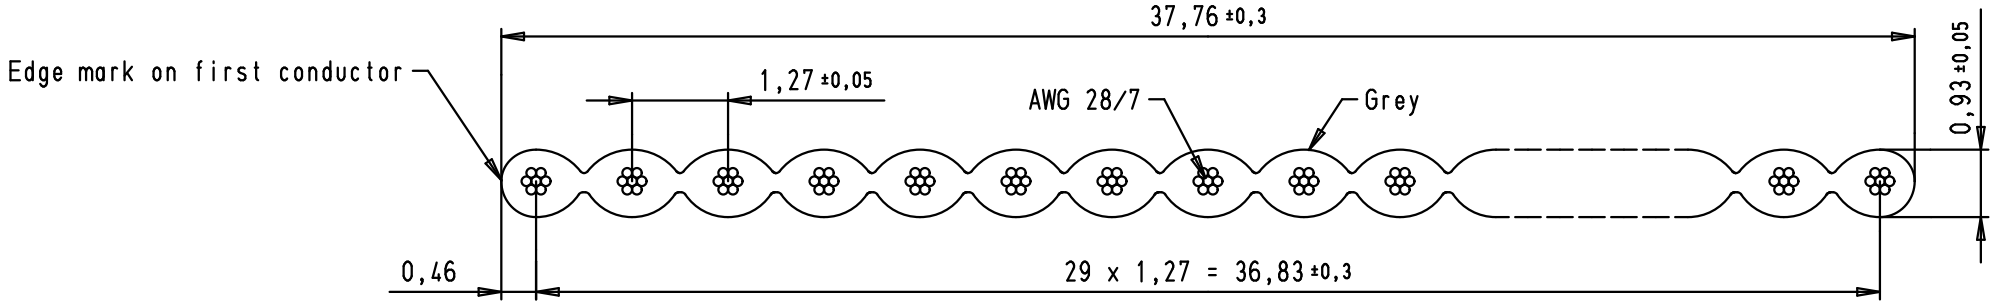

Wire	Tinned copper
Gauge	AWG 28/7 0,089 mm²
Voltage rating	300 Vr.m.s
Current rating	2,1A at 25°C
Capacity unbalanced	45,9 pF/m at 1 MHz
Impedance unbalanced	105 Ω
Propagation delay	4,9 ns/m nominal
Insulation material	PVC
Temperature rating	-20°C (operating) / -30°C (static) to +105°C
Flammability rating	Flame retardant VW1
Insulation resistance	100 MΩ/km
Approval	UL AWM style 2651

09 18 028 7004	100m (328 feet)
09 18 028 7001	30,48m (100 feet)
Part number	Lenght per reel

				Dat.	Name
			Detail.	19/02/10	SC
			Insp.		
			Stand.		
EC01360	19/02/10	SC			
Mod.	Dat.	Name			

All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris

SEK 18 flat cable
30 poles

TB 09 18 030 700X

Sub.

Maßstab/ *Scale* 10:1

Blatt/ *Page* 1/1