USB 2.0 type A

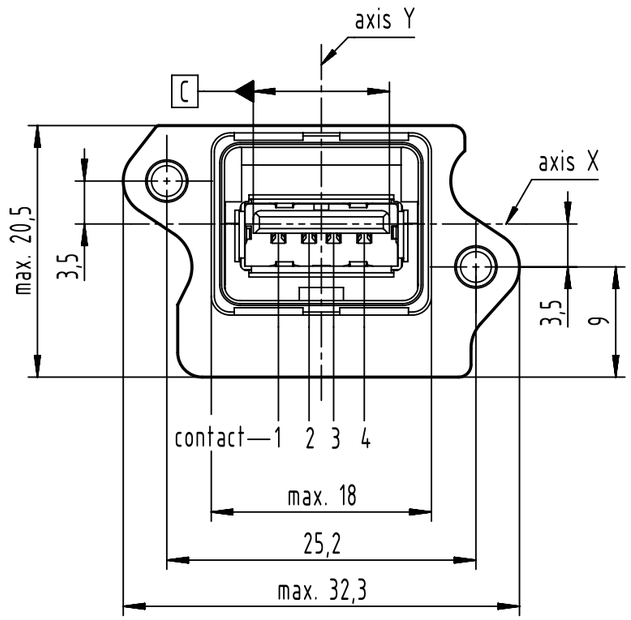

A-A

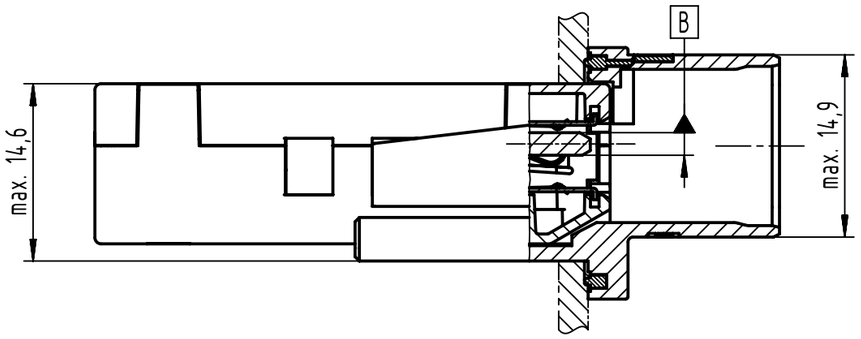

USB 2.0 type A

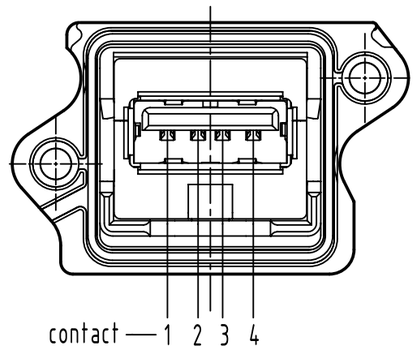

panel cutting

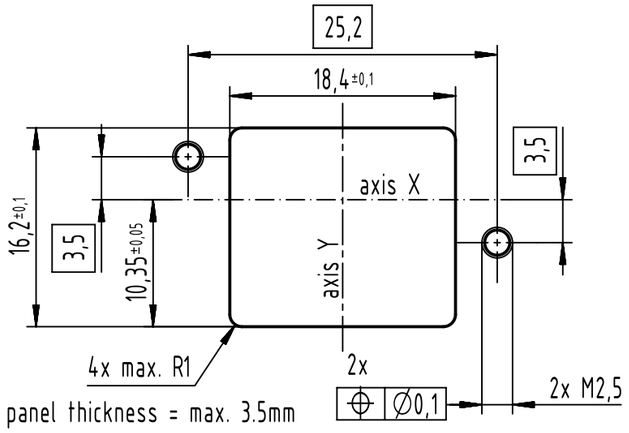

panel thickness = max. 3.5mm
no limit with pre-assembled
USB Adapter

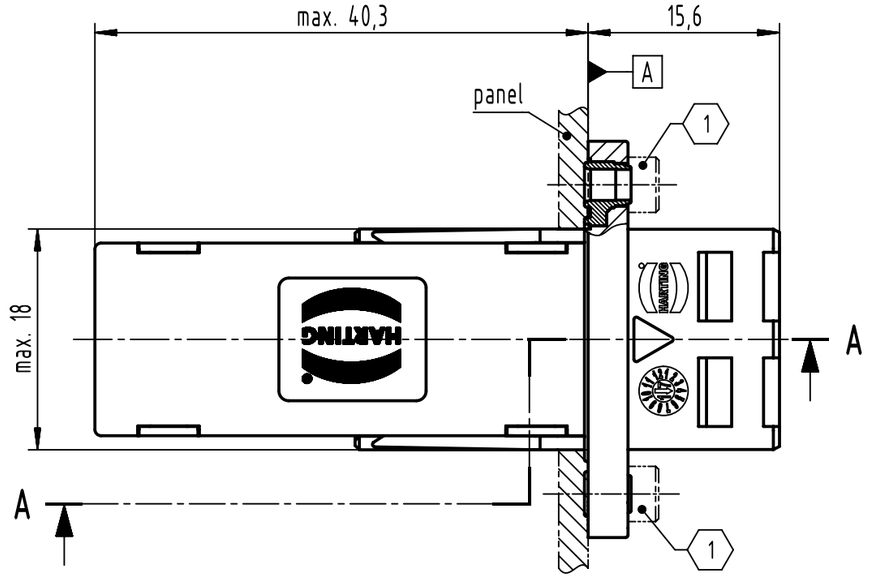

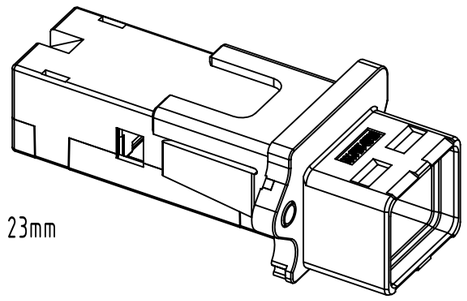

connector pitch on panel:
axis X = 27mm and axis Y = 21mm

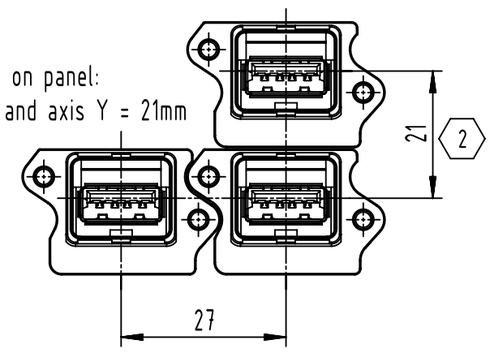

loading-plan

V Bus	1	1
D-	2	2
D+	3	3
GND	4	4
Shield	Shell	Shell

(2) connector pitch with coding clip 0945840002X Y = 23mm

(1) 2x M2.5; screws acc. to ISO 4762;
please order separately; bolting torque 0.3Nm - 0.5Nm

references A, B and C acc. to USB specification 2.0 ; www.usb.org

further information see product data sheet

All Dimensions in mm Original Size DIN A3	Scale 2:1	Free size tol.			Ref. / Sub.
All rights reserved	Created by STORCK	Inspected by TADJE	Standardisation 302077	Date 2021-04-29	State Final Release
Department EL PD	Title: HARTING PushPull V4 Compact Housing with USB 2.0 type A				Doc-Key / ECM-Nr. 100671794/UGD/000/F 500000194222
HARTING D-32339 Espelkamp	Type TB	Number 09452451920		Rev. F	Page 1/1

A3