

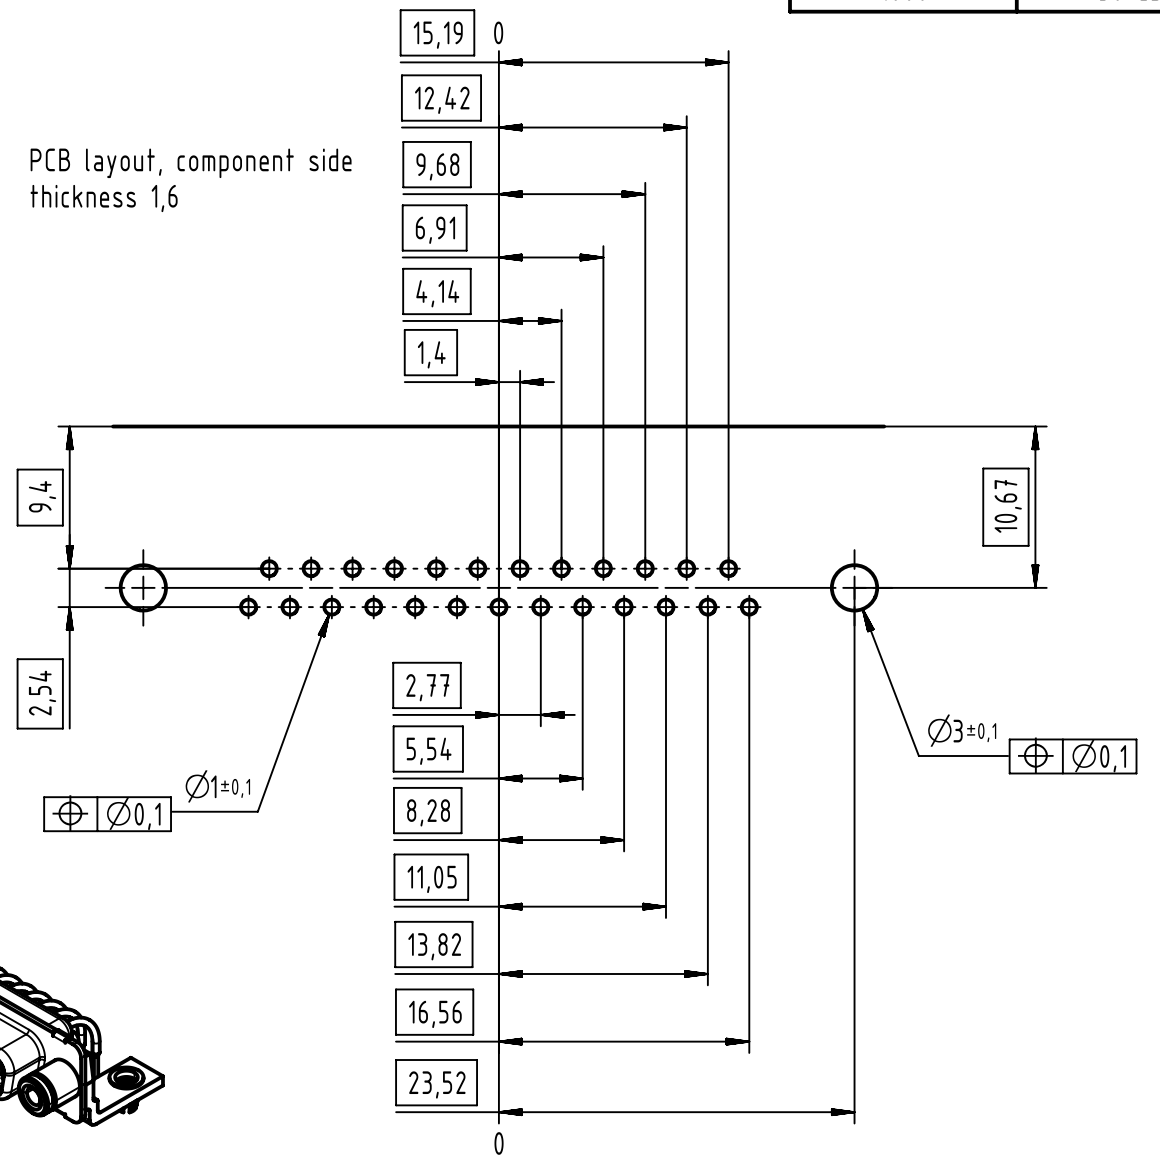
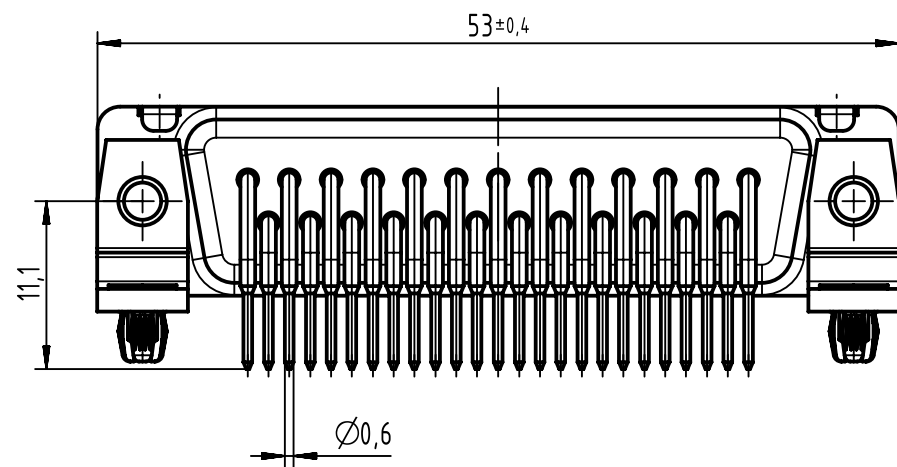
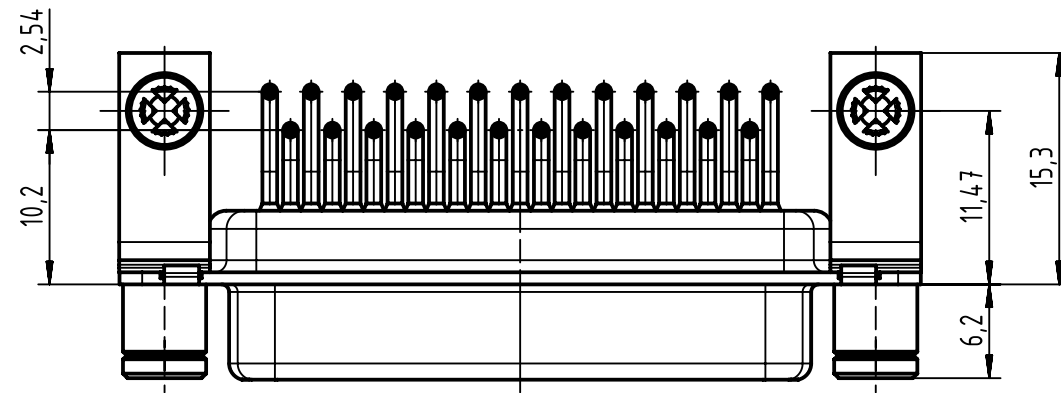
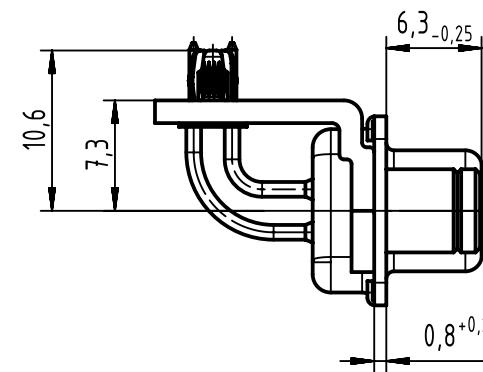


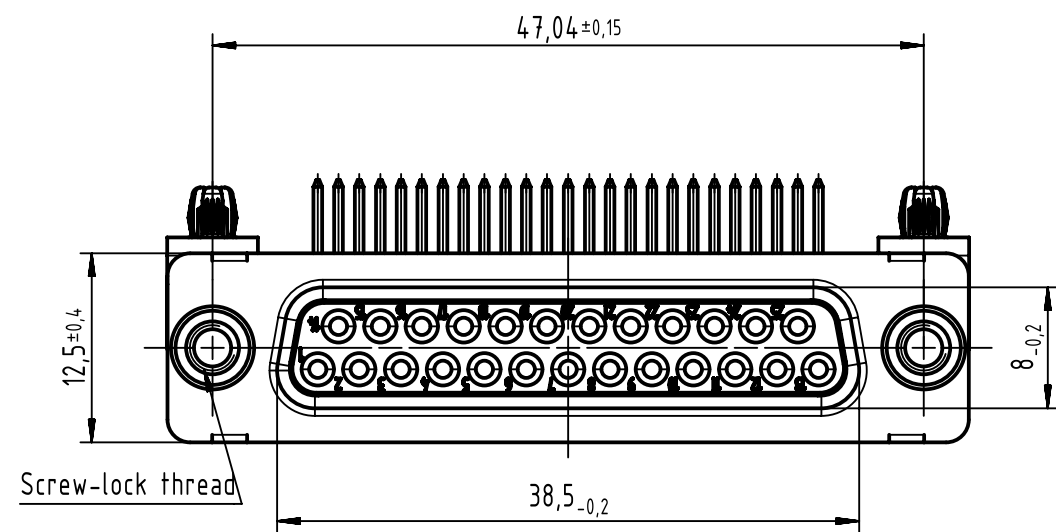


|                       |            |
|-----------------------|------------|
| Mating Cycles         | 500        |
| Filter type           | C          |
| Capacitance           | 1000pf±20% |
| Working Voltage       | 100V       |
| Current Rating        | 7,5A       |
| Insulation Resistance | >1GΩ       |

| FREQUENCY<br>(MHz) | ATTENUATION<br>(dB) |
|--------------------|---------------------|
| 5                  | 1 dB                |
| 10                 | 3 dB                |
| 50                 | 12 dB               |
| 100                | 20 dB               |
| 500                | 34 dB               |
| 1000               | 30 dB               |

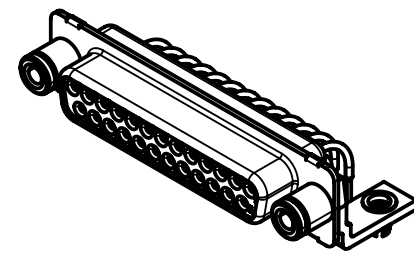

|               |                   |
|---------------|-------------------|
| 0964 314 7234 | 4-40 UNC          |
| 0964 314 7235 | M3                |
| Part number   | Screw-lock thread |

|                                                                                                                                    |  |                                                         |                       |                             |                    |                                                          |
|------------------------------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------|-----------------------|-----------------------------|--------------------|----------------------------------------------------------|
|  All Dimensions in mm<br>Original Size DIN A3 |  | Scale<br>2:1                                            | Free size tol.        |                             | Ref.<br>Sub.       |                                                          |
| All rights reserved                                                                                                                |  | Created by<br>ZHUANGJ                                   | Inspected by<br>LUOK  | Standardisation<br>HOFFMANN | Date<br>2018-08-28 | State<br>Final Release                                   |
| Department EL PD                                                                                                                   |  | Title<br>D-Sub female angled 25-pole turned solder pins |                       |                             |                    | Doc-Key / ECM-Nr.<br>100801512/UGD/000/A<br>500000139092 |
| HARTING Electronics GmbH<br>D-32339 Espelkamp                                                                                      |  | Type<br>TB                                              | Number<br>0964314723X |                             |                    | Rev. A<br>Page 1/1                                       |