

CRZ 2017A | RoHS COMPLIANT

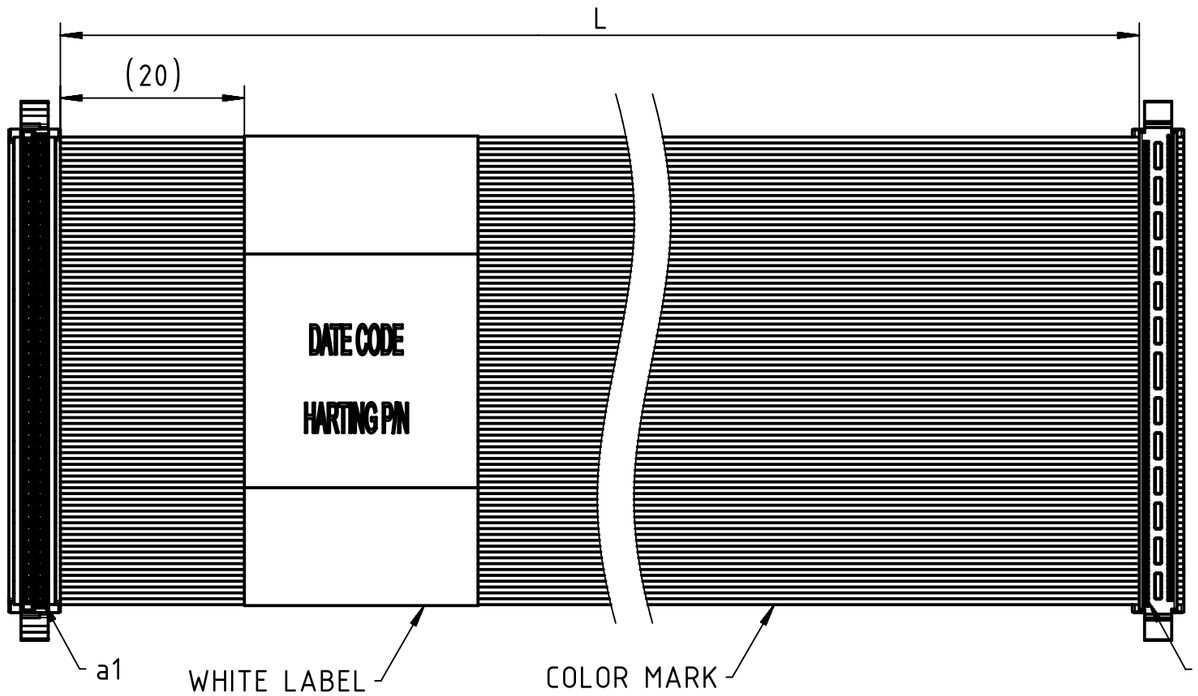

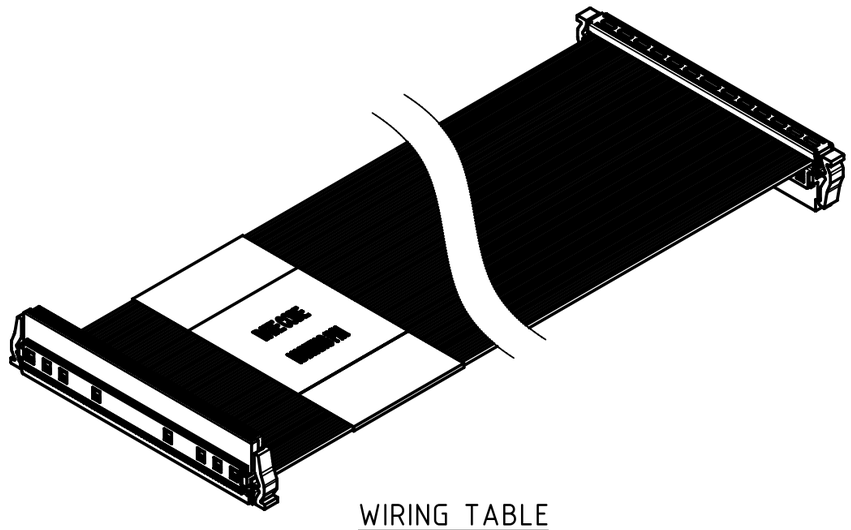

HAR-FLEX 80 POLE FEMALE CONNECTOR

HAR-FLEX 80 POLE FEMALE CONNECTOR

WIRING TABLE

C1	WIRE	C2
1	AWG 30	1
2	AWG 30	2
3	AWG 30	3
...	...	...
79	AWG 30	79
80	AWG 30	80

NOTES:

1.)CABLE MUST BE PERFORMED 100% CONTINUITE TEST AND HI-POT TEST.
2.)CABLE OPERATION TEMPERATURE: -20°C TO +105°C
3.)CABLE SHOULD BE PACKED BY THE PLASTIC BAG,THEN PUT IT INTO THE CARTON (QTY ACCORDING TO ACTUAL CONDITION) EXPORT CARTON SHOULD BE STICKED THE LABEL WITH P/N AND QTY.
4.)WHITE LABEL CONTENT:

DATA CODE
HARTING P/N

HARTING P/N	CABLE LENGTH (L)
33152430100379	100 ± 3
33152430200379	200 ± 5
33152430500379	500 ± 5

All Dimensions in mm | Tech. Character. | Free size tol. | According to production drawing

All rights reserved

Department HCS - CN

HARTING Customised Solutions
D-32339 Espelkamp

Created by	Inspected by	Standardisation	Date	State
LINI Lin	QINL Qin	QINL Qin	2019-08-02	Final Release

Title: Har-Flex 80Pole,Dul-end,W/O SR,L=xxMM

Doc-Key / ECM-Nr.: 100833801/UGD/000/A 500000156070

Type: TB | Number: 33 15 243 XXX0379 | Rev.: A | Page: 1/1

A3