

CRZ 2019A | RoHS COMPLIANT

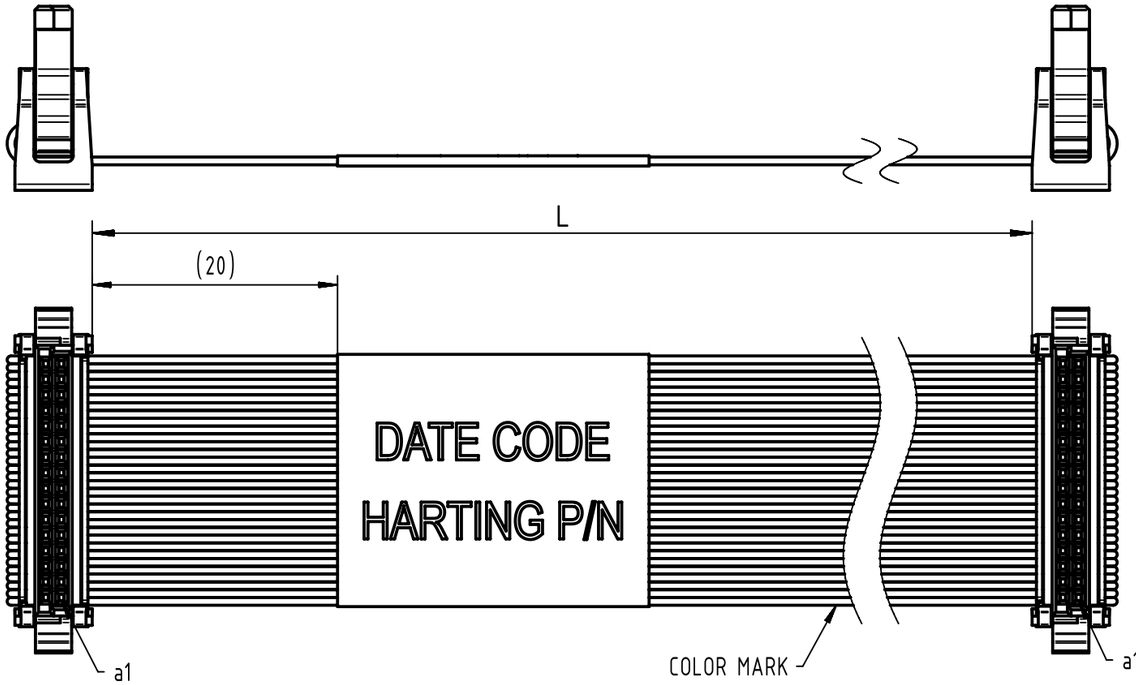

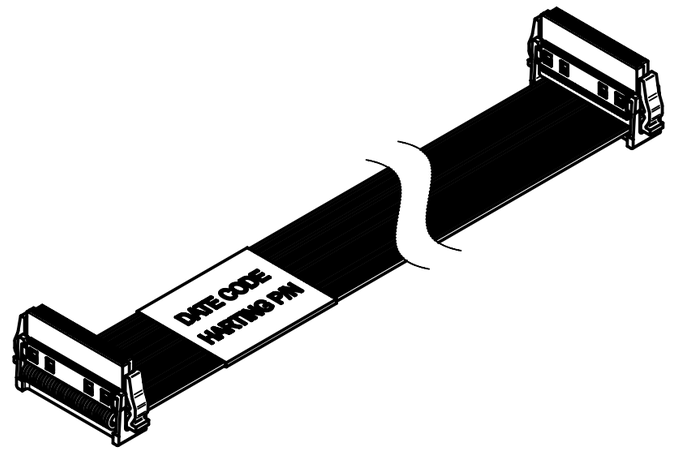

HAR-FLEX 32 POLE FEMALE CONNECTOR
WITH STRAIN RELIEF

HAR-FLEX 32 POLE FEMALE CONNECTOR
WITH STRAIN RELIEF

WIRING TABLE

C1	WIRE	C2
1	AWG 30	1
2	AWG 30	2
3	AWG 30	3
-	AWG 30	-
31	AWG 30	31
32	AWG 30	32

HARTING P/N	LENGTH (L)
33152430100383	100±3
33152430200383	200±5
33152430500383	500±5

NOTES:

1.)CABLE MUST BE PERFORMED 100% CONTINUITE TEST AND HI-POT TEST.
2.)CABLE OPERATION TEMPERATURE: -20°C TO +105°C
3.)CABLE SHOULD BE PACKED BY THE PLASTIC BAG,THEN PUT IT INTO THE CARTON (QTY ACCORDING TO ACTUAL CONDITION) EXPORT CARTON SHOULD BE STICKED THE LABEL WITH P/N AND QTY.
4.)WHITE LABEL CONTENT:

DATA CODE

HARTING P/N

Coating \ | A= \ mm² | V= \ mm³ | m= \ g | Mat. See bill of materials

All Dimensions in mm
Original Size DIN A3

Scale 2:1 | Free size tol. \ | Ref. \ | Sub. \

All rights reserved

Department HCS - CN

HARTING Customised Solutions
D-32339 Espelkamp

Created by	Inspected by	Standardisation	Date	State
LINI Lin	QINL Qin	QINL Qin	2019-08-03	Final Release

Title: Har-Flex 32Pole,Dul-end,With SR,L=xxMM

Doc-Key / ECM-Nr.: 100835281/UGD/000/A 500000156105

Type TB | Number 33 15 243 XXX0383 | Rev. A | Page 1/1

A3