



X →

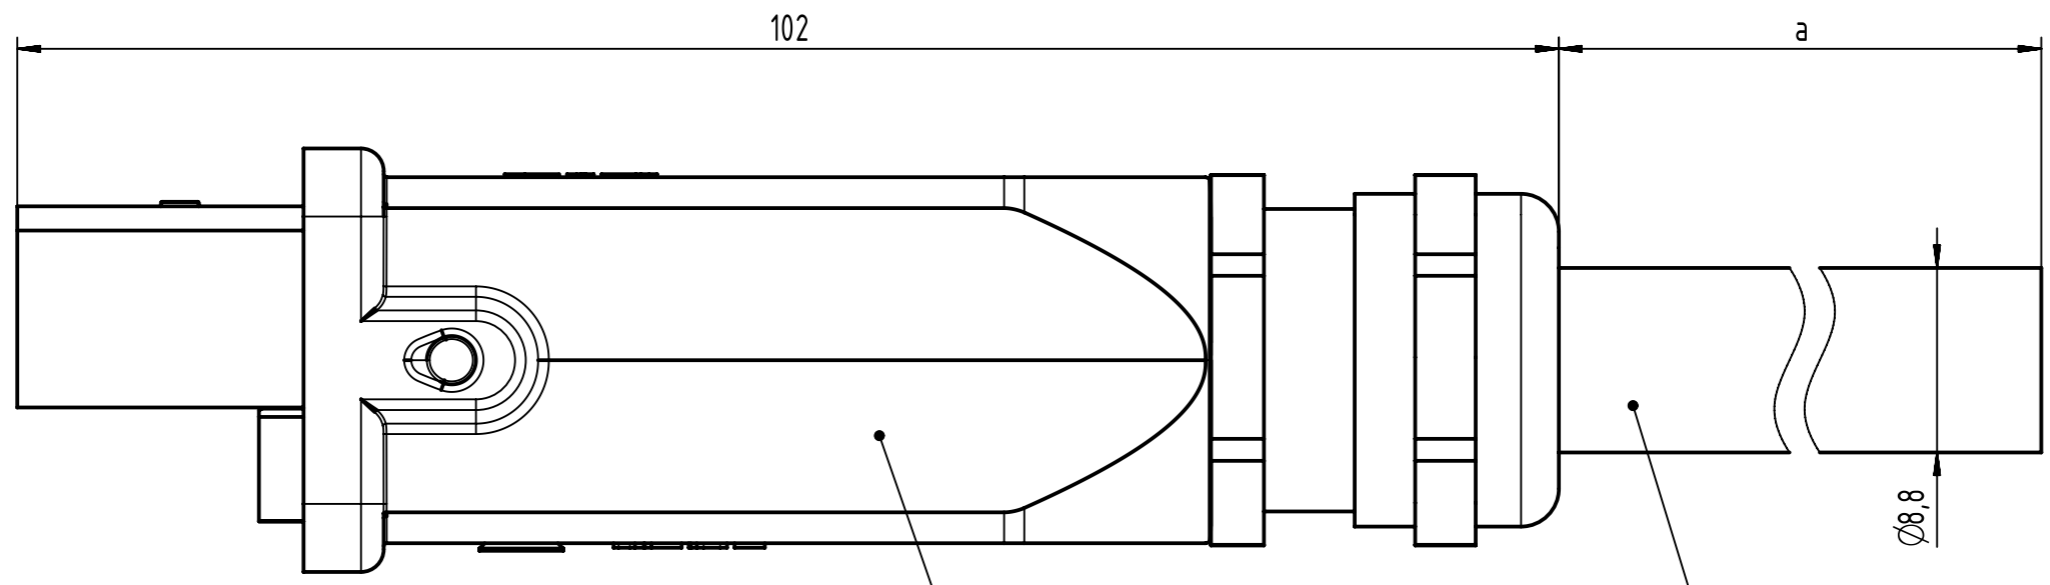

Hybrid Han 3A - LC Duplex and Power AC, with metal housing

Hybrid outdoor cable  
2xFO Singlemode + 3x2.5sqmm

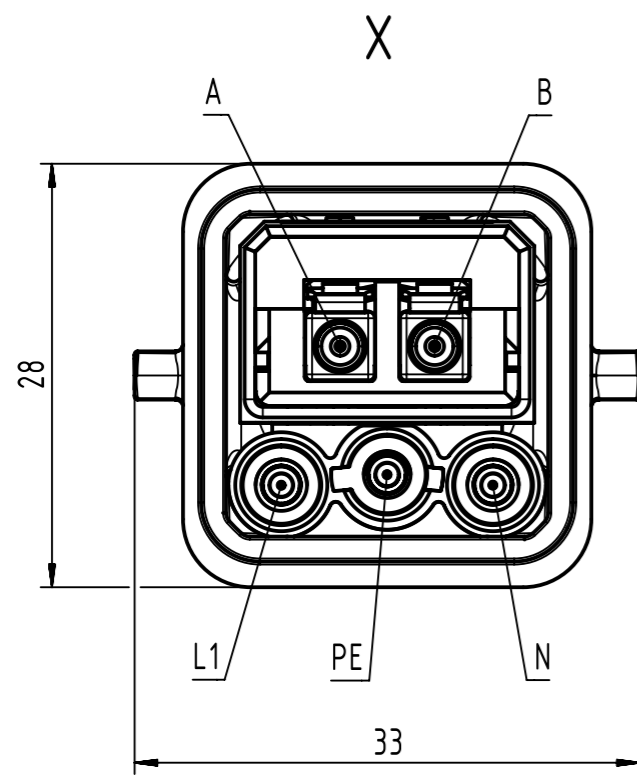


Loading-Plan  
(Power AC version)

Shield (not connected)

- A — Orange
- B — Blue
- L1 — Black
- N — Blue
- PE — Green-Yellow

- Protection level: IP65/IP67
- Temperature range: -40°C ... +70°C

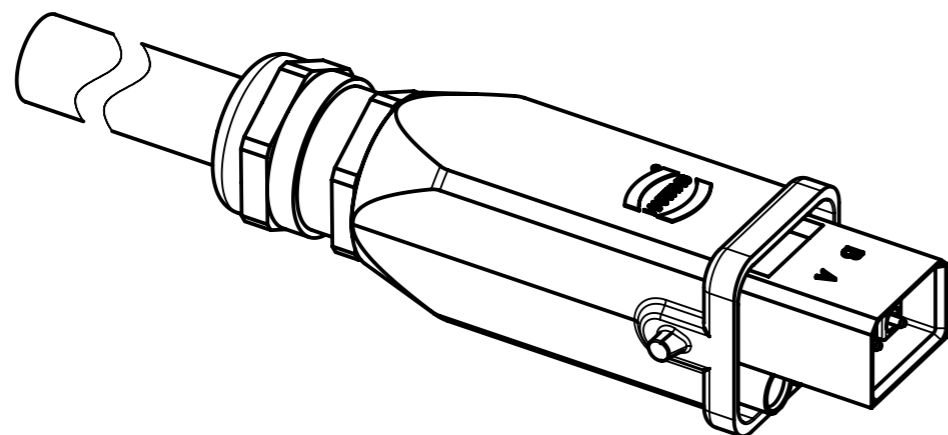

9	33571113005003	Hybrid cable 2xFO - 3x2.5/3.5	300
8	33571111005003		100
7	33571110605003		60
6	33571110505003		50
5	33571110405003		40
4	33571110205003		20
3	33571110105003		10
2	33571110055003		5
1	33571110015003		1
Cont No.	Part-No.	Type of cable	Dim.a

All Dimensions in mm Original Size DIN A3		Scale 2:1	Free size tol.		Ref. Sub.
All rights reserved Department EC PD - RO		Created by POPESCUD	Inspected by AVRAM	Standardisation HOFFMANN	Date 2015-12-18
HARTING Electronics GmbH D-32339 Espelkamp		Title Han 3A FO Hybrid Cable Assembly			State Final Release
		Type TB	Number 3357111XXX5003		Doc-Key / ECM-Nr. 100183341/UGD/037/A 50000098235
				Rev. A	Page 1/1