

## Han-Snap Carrier, Standard, pivoting

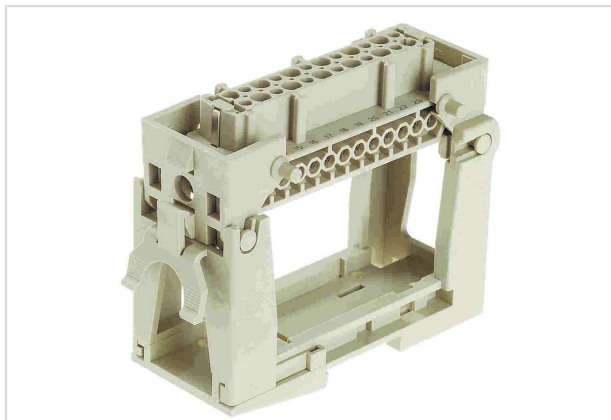


Image is for illustration purposes only. Please refer to product description.

|                    |                                                                                       |
|--------------------|---------------------------------------------------------------------------------------|
| Part number        | 09 33 000 9801                                                                        |
| Specification      | Han-Snap Carrier, Standard, pivoting                                                  |
| HARTING eCatalogue | <a href="https://b2b.harting.com/09330009801">https://b2b.harting.com/09330009801</a> |

### Identification

|                              |                                  |
|------------------------------|----------------------------------|
| Category                     | Accessories                      |
| Series                       | Han-Snap®                        |
| Type of accessory            | Insert mounting                  |
| Description of the accessory | Swinging<br>for standard inserts |

### Technical characteristics

|                      |                 |
|----------------------|-----------------|
| Tightening torque    | 0.8 Nm          |
| Limiting temperature | -40 ... +125 °C |
| Retention force      | ≥450 N On rail  |

### Material properties

|                                           |                                                           |
|-------------------------------------------|-----------------------------------------------------------|
| Material (accessories)                    | Polycarbonate (PC)                                        |
| Colour (accessories)                      | RAL 7032 (pebble grey)                                    |
| Material flammability class acc. to UL 94 | V-0                                                       |
| RoHS                                      | compliant                                                 |
| ELV status                                | compliant                                                 |
| China RoHS                                | e                                                         |
| REACH Annex XVII substances               | Not contained                                             |
| REACH ANNEX XIV substances                | Not contained                                             |
| REACH SVHC substances                     | Yes                                                       |
| REACH SVHC substances                     | Potassium 1,1,2,2,3,3,4,4,4-nonafluorobutane-1-sulphonate |
| California Proposition 65 substances      | Yes                                                       |



Pushing Performance  
Since 1945

Material properties

|                                     |                      |
|-------------------------------------|----------------------|
| Fire protection on railway vehicles | EN 45545-2 (2020-08) |
| Requirement set with Hazard Levels  | R22 (HL 1-3)         |
|                                     | R23 (HL 1-3)         |

Specifications and approvals

|                |                                      |
|----------------|--------------------------------------|
| Specifications | IEC 60068-2-6 Vibration (sinusoidal) |
|                | IEC 60068-2-27 Shock                 |

Commercial data

|                                |                                                   |
|--------------------------------|---------------------------------------------------|
| Packaging size                 | 1                                                 |
| Net weight                     | 90 g                                              |
| Country of origin              | Germany                                           |
| European customs tariff number | 85389099                                          |
| GTIN                           | 5713140050327                                     |
| eCl@ss                         | 27440210 Fixing element for industrial connectors |