

## Han 1A CA M12-X-cod. +latch m/m PVC 5m

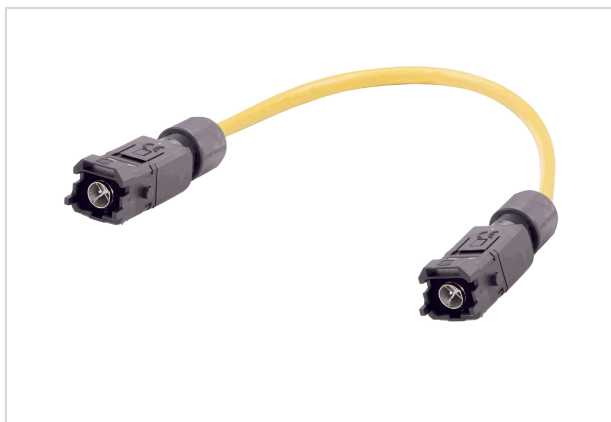


Image is for illustration purposes only. Please refer to product description.

Part number	33 50 525 2808 050
Specification	Han 1A CA M12-X-cod. +latch m/m PVC 5m
HARTING eCatalogue	<a href="https://b2b.harting.com/33505252808050">https://b2b.harting.com/33505252808050</a>

### Identification

Category	System cabling
Series	Han <sup>®</sup> 1A
Element	Cable assemblies
Specification	Pre-assembled on both sides
Connector 1	Han <sup>®</sup> 1A
Connector 2	Han <sup>®</sup> 1A

### Version

Cable length	5 m
Number of cores	8
Core structure	4x 2x AWG 26/7
Coding	X-coding
Locking type	Snap-in latches

### Technical characteristics

Transmission characteristics	Cat. 6A Class E <sub>A</sub> up to 500 MHz
Data rate	10 Mbit/s
	100 Mbit/s
	1 Gbit/s
	2.5 Gbit/s
	5 Gbit/s
Limiting temperature	-20 ... +80 °C unmoved
	-20 ... +80 °C moved



**Pushing Performance**  
Since 1945

## Material properties

Material (cable)	PVC
Colour (cable)	Yellow
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead Nickel

## Specifications and approvals

Specifications	EN 50173-1 IEC 60332-1-2
----------------	-----------------------------

## Commercial data

Packaging size	1
Country of origin	Romania
European customs tariff number	85444290
GTIN	5713140244313
eCl@ss	27060311 Assembled sensor actuator-line