


Protection cap

Hybrid Han 3A - LC Duplex and Power AC, with metal housing

Hybrid outdoor cable
2xFO singlemode + 3x2,5sqmm

ø8,8


X 2:1
(without FO protection cap)

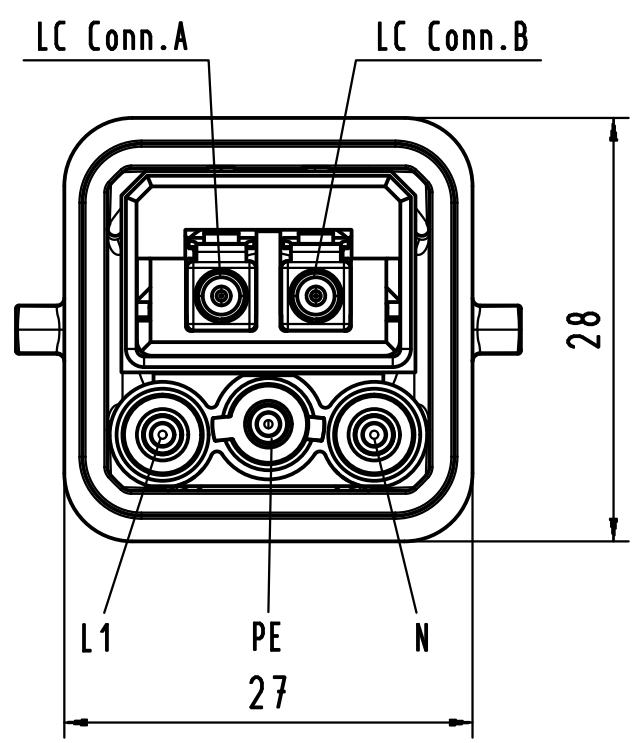

Loading-Plan

	Shield (not connected)
A	Orange 1
B	Orange 2
L1	Black
N	Blue
PE	Green-Yellow

-Protection level: IP65/67
-Temperature range: -40°C ... +70°C

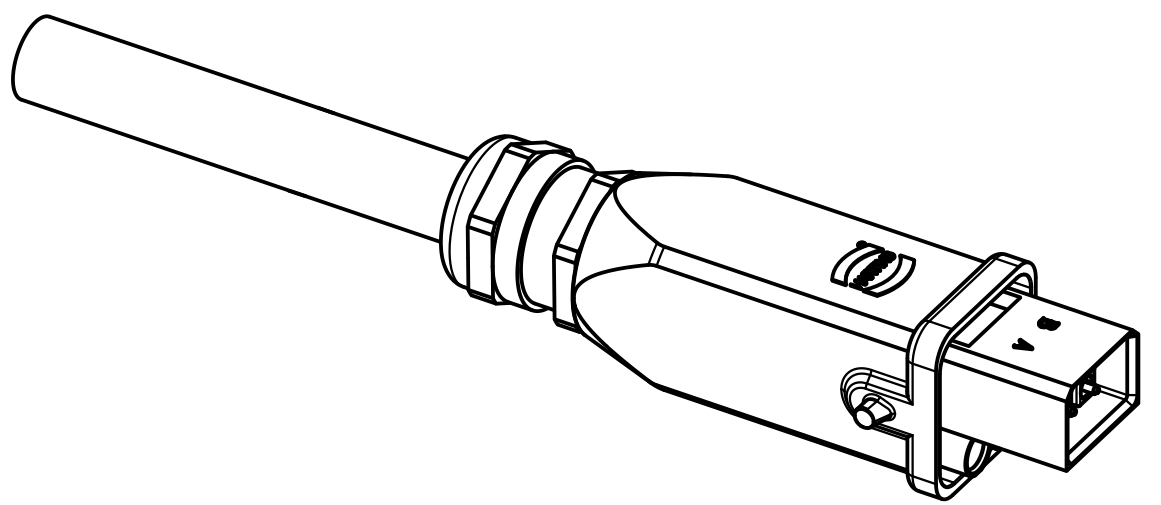

9	Hybrid cable 2xFO+3x2,5/3,5	33 57 111 300 5003	300 m
8	Hybrid cable 2xFO+3x2,5/3,5	33 57 111 100 5003	100 m
7	Hybrid cable 2xFO+3x2,5/3,5	33 57 111 060 5003	60 m
6	Hybrid cable 2xFO+3x2,5/3,5	33 57 111 050 5003	50 m
5	Hybrid cable 2xFO+3x2,5/3,5	33 57 111 040 5003	40 m
4	Hybrid cable 2xFO+3x2,5/3,5	33 57 111 020 5003	20 m
3	Hybrid cable 2xFO+3x2,5/3,5	33 57 111 010 5003	10 m
2	Hybrid cable 2xFO+3x2,5/3,5	33 57 111 005 5003	5 m
1	Hybrid cable 2xFO+3x2,5/3,5	33 57 111 001 5003	1 m

Cont No.	Type of cable	Part-No.	Dim. a
----------	---------------	----------	--------

	All Dimensions in mm Original Size DIN A 3		Techn. Character.		Nicht tolerierte Maße/											
			<table border="1"> <tr> <th>Dat.</th> <th>Name</th> <th>Maßstab/Scale</th> </tr> <tr> <td>Detail. 07.12.09</td> <td>MS</td> <td rowspan="3">/</td> </tr> <tr> <td>Insp. 07.12.09</td> <td>RA</td> </tr> <tr> <td>Stand.</td> <td></td> </tr> </table>		Dat.	Name	Maßstab/Scale	Detail. 07.12.09	MS	/	Insp. 07.12.09	RA	Stand.		Hybrid cable assembly, 2xFO + POWER 3x2,5 mm² 1xHAN3A, LC duplex SM, 3xpower AC	
	Dat.	Name	Maßstab/Scale													
	Detail. 07.12.09	MS	/													
Insp. 07.12.09	RA															
Stand.																
DRS609A		HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP		TB 33 57 111 xxx 5003												
Mod.	Dat.	Name														
				Sub. Sub.												

Alle Rechte vorbehalten. All rights reserved

Blatt/ page