

DIN-Signal coax f, solder/crimp, 75Ohm

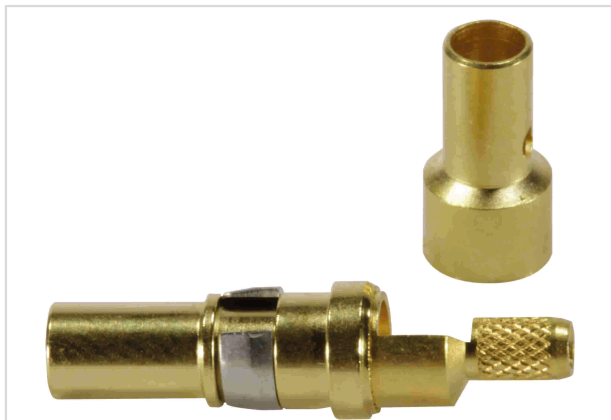


Image is for illustration purposes only. Please refer to product description.

Part number	09 03 000 6281
Specification	DIN-Signal coax f, solder/crimp, 75Ohm
HARTING eCatalogue	https://b2b.harting.com/09030006281

Identification

Category	Contacts
Type of contact	Coaxial contact
Description of the contact	Straight
Contacts for	DIN 41612 Type M DIN 41612 Type MH 21+5 DIN 41612 Bauform M 0+2 har-modular® M module, male, angled har-modular® M module, male, straight

Version

Termination method	Solder/crimp termination
Gender	Female contact for male connectors
Manufacturing process	Turned contacts
Performance level	1

Technical characteristics

Impedance	75 Ω
Mating cycles	≥500

Material properties

Material (contacts)	Copper alloy
Surface (contacts)	Noble metal
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight



Pushing Performance

Material properties

ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead
ECHA SCIP number	339476a1-86ba-49e9-ab4b-cd336420d72a

Specifications and approvals

Specifications	DIN 41626
----------------	-----------

Commercial data

Packaging size	40
Net weight	33.96 g
Country of origin	Germany
European customs tariff number	85366990
eCl@ss	27440204 Contact for industrial connectors