

## SEK-18 SV MA STD STR29 40P PL2 KINK

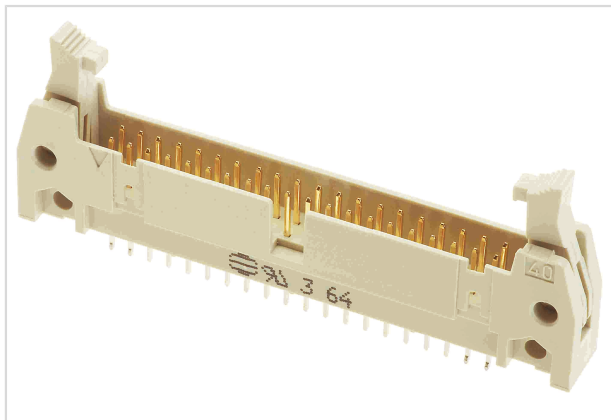


Image is for illustration purposes only. Please refer to product description.

|                    |   |
|--------------------|---|
| Part number        | 09 18 540 6024  |
| Specification      | SEK-18 SV MA STD STR29 40P PL2 KINK   |
| HARTING eCatalogue | <a href="https://b2b.harting.com/09185406024">https://b2b.harting.com/09185406024</a> |

### Identification

|                            |                    |
|----------------------------|--------------------|
| Category                   | Connectors         |
| Series                     | SEK Standard       |
| Element                    | Male connector     |
| Description of the contact | Straight<br>Kinked |

### Version

|                    |                            |
|--------------------|----------------------------|
| Termination method | Wave soldering termination |
| Connection type    | PCB to cable               |
| Number of contacts | 40                         |
| Termination length | 2.9 mm                     |
| Performance level  | 2                          |

#### Details

Through kinked contacts, connectors are simultaneously fixed on the PCB during assembly. They represent a particularly inexpensive alternative, since otherwise usual fixing elements such as screws, rivets or clips are not required.

### Technical characteristics

|                                    |                           |
|------------------------------------|---------------------------|
| Contact rows                       | 2                         |
| Contact spacing (termination side) | 2.54 mm                   |
| Rated current                      | 1 A                       |
| Insulation resistance              | $>10^9 \Omega$            |
| Contact resistance                 | $\leq 20 \text{ m}\Omega$ |
| Limiting temperature               | -55 ... +125 °C           |
| Insertion and withdrawal force     | $\leq 80 \text{ N}$       |



Pushing Performance

## Technical characteristics

|                           |                               |
|---------------------------|-------------------------------|
| Mating cycles             | ≥250                          |
| Test voltage $U_{r.m.s.}$ | 1 kV                          |
| Isolation group           | IIIa ( $175 \leq CTI < 400$ ) |
| PCB thickness             | 1.5 mm +0.44                  |

## Material properties

|   |  |
|---|--|
| Material (insert)                         | Thermoplastic resin (PBT)                                |
| Colour (insert)                           | Grey   |
| Material (contacts)                       | Copper alloy   |
| Surface (contacts)                        | Sn over Ni Termination side<br>Au over Pd/Ni Mating side |
| Material flammability class acc. to UL 94 | V-0  |
| RoHS                                      | compliant  |
| ELV status                                | compliant  |
| China RoHS                                | e  |
| REACH Annex XVII substances               | No   |
| REACH ANNEX XIV substances                | No   |
| REACH SVHC substances                     | No   |

## Specifications and approvals

|                        |  |
|------------------------|--|
| Specifications         | IEC 60603-13   |
| UL / CSA               | UL 1977 ECBT2.E102079<br>CSA-C22.2 No. 182.3 ECBT8.E102079 |
| Railway classification | F3/I3  |

## Commercial data

|                                |  |
|--------------------------------|--|
| Packaging size                 | 50                                       |
| Net weight                     | 12.25 g                                  |
| Country of origin              | Romania                                  |
| European customs tariff number | 85366990                                 |
| eCl@ss                         | 27460201 PCB connector (board connector) |

### Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Temperature raise
- ② Derating curve
- ③ Derating curve 80%

### Cross section of solder termination

