

## RJI RJ45 jack 1Gbit angl. LV biLEDs LV

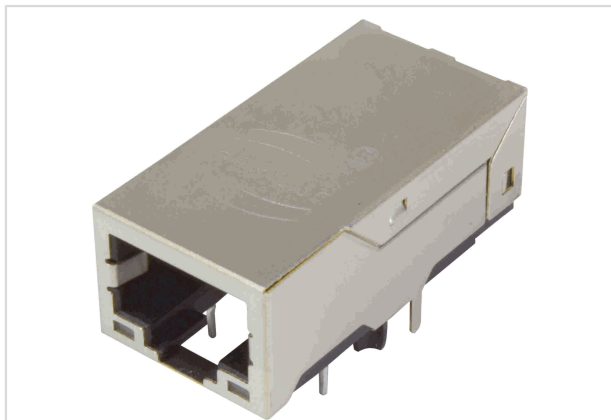


Image is for illustration purposes only. Please refer to product description.

Part number	09 45 551 1542
Specification	RJI RJ45 jack 1Gbit angl. LV biLEDs LV
HARTING eCatalogue	<a href="https://b2b.harting.com/09455511542">https://b2b.harting.com/09455511542</a>

### Identification

Category	Connectors
Series	HARTING RJ Industrial®
Identification	Magnetics
Element	Female
Specification	RJ45 with integrated transformer Angled

### Version

Termination method	Reflow soldering termination (THR)
Shielding	Fully shielded, 360° shielding contact
Number of contacts	8

### Technical characteristics

Rated voltage	30 V
Data rate	10 Mbit/s 100 Mbit/s 1 Gbit/s
Limiting temperature	-40 ... +85 °C
Mating cycles	≥750
Degree of protection acc. to IEC 60529	IP20

### Material properties

RoHS	compliant
------	-----------



**Pushing Performance**  
Since 1945

## Material properties

ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained

## Specifications and approvals

Approvals	DNV GL
UL / CSA	UL 1977 DUXR2.E254191 CSA-C22.2 No. 182.4, No. 233-09 DUXR8.E254191

## Commercial data

Packaging size	40
Net weight	9.76 g
Country of origin	China
European customs tariff number	85366990
GTIN	5713140224544
eCl@ss	27460201 PCB connector (board connector)