

## M12 T1 SPE 1x2xAWG22/7 PUR 0,5m

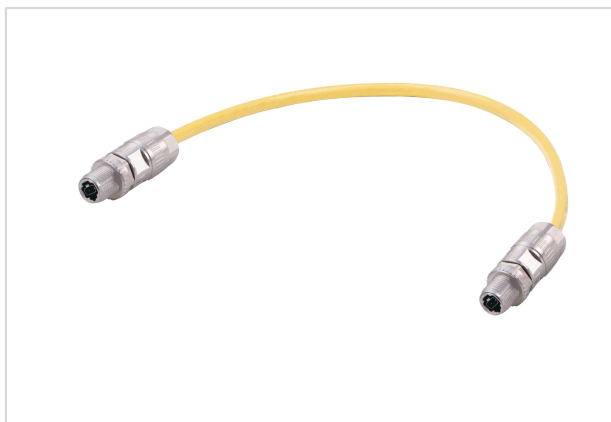


Image is for illustration purposes only. Please refer to product description.

Part number	33 28 141 4002 005
Specification	M12 T1 SPE 1x2xAWG22/7 PUR 0,5m
HARTING eCatalogue	<a href="https://b2b.harting.com/33281414002005">https://b2b.harting.com/33281414002005</a>

### Identification

Category	System cabling
Series	HARTING T1 Industrial Circular connectors M12
Element	Cable assemblies
Specification	Pre-assembled on both sides
Connector 1	M12 Single Pair Ethernet (SPE) Slim Design Straight
Connector 2	M12 Single Pair Ethernet (SPE) Slim Design Straight
Type of cable	Copper cable (round)
Description of the cable	Halogen-free Oil resistant Flame retardant

### Version

Cable length	0.5 m
Number of cores	2
Core structure	1x 2x AWG 22/7
Termination method	Crimp termination
Gender	Male
Shielding	Fully shielded, 360° shielding contact
Number of contacts	2
further contacts	+ shielding



Pushing Performance  
Since 1945

## Version

Coding	Single Pair Ethernet (SPE)
Locking type	Screw locking

## Technical characteristics

Rated current	4 A
Rated voltage	60 V DC
Transmission characteristics	600 MHz Bandwidth
Data rate	10 Mbit/s
	100 Mbit/s
	1 Gbit/s
	2.5 Gbit/s
	5 Gbit/s
	10 Gbit/s
Contact resistance	≤20 mΩ
Shielding resistance	≤100 mΩ
Limiting temperature	-40 ... +80 °C unmoved
	-25 ... +80 °C moved
Mating cycles	≥1,000
Degree of protection acc. to IEC 60529	IP65 / IP67 mated condition
Test voltage U <sub>DC</sub>	1 kV (contact-contact)
	2.25 kV (contact-ground)

## Material properties

Material (hood/housing)	Zinc die-cast
Material (cable)	PUR (polyurethane)
Colour (cable)	Yellow
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead
	Nickel



**Pushing Performance**  
Since 1945

## Specifications and approvals

Specifications	IEC 63171-6
	IEEE 802.3bu (remote power supply over PoDL = Power over Data Line)
	IEEE 802.3cg (10BASE-T1)
	IEEE 802.3bw (100BASE-T1)
	IEEE 802.3bp (1000BASE-T1)
	IEEE 802.3ch (2.5GBASE-T1 / 5GBASE-T1 / 10GBASE-T1)
	IEC 60332-1-2 Flame retardancy EN 60811-404 Oil resistance

## Commercial data

Packaging size	1
Country of origin	Latvia
European customs tariff number	85444290
GTIN	5713140247086
eCl@ss	27060390 Ready-made data cable (unspecified)